



# Water Temperature Control - Recirculation Systems

## Digital


### The Brain® Model DMC80BS

DMC80BS is a fully Digital Mixing Center (DMC), with SAGE® hot water system monitoring and reporting tool, designed specifically to be the primary water temperature controller in a continuously pumped circulating hot water system.

Digital technology provides enhanced water temperature control accuracy which resists zero system demand "Temperature Creep" without the use of a manual throttling valve or a temperature activated pump shut-off device (aquastat).

SAGE® (BS) available with specific ProtoCessor cards for BAS connectivity to systems which operate on Modbus TCP, BACnet™, or LonWorks™ protocols.

Mobile connectivity features smart hot water system dashboard monitoring, secure remote programming, multi-location view, temperature and system diagnostic alerts, with unlimited digital documentation and automated report generation. Mobile connectivity may be enabled by a customer activated subscription.

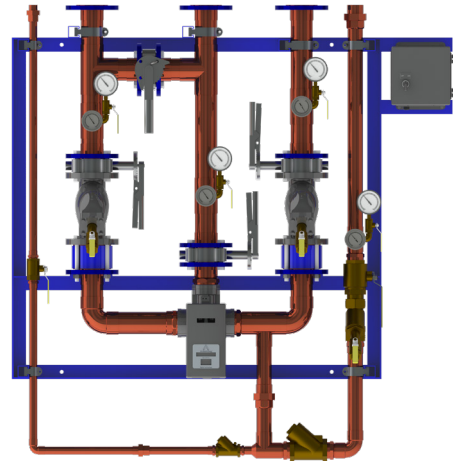


## Operational Specifications (DRV80)

- +/-2°F DRV water temperature control at peak, moderate or zero fixture demand on hot water system designed for continuous recirculation
- 1°F minimum recirculating water temperature differential
- LCD display which indicates: set point, delivered temperature, error codes and alarm conditions capable of BAS and mobile connectivity
- Programmable set point range of 81-158°F (27-70°C) capable of BAS or mobile monitoring and adjustment
- Programmable thermal disinfection range of 158-185°F (70-85°C)
- Programmable 1st level hi/lo temp alarm display capable of BAS or mobile alerting
- Automatic safe closure of hot water inlet in response to: inlet supply failure, 110V power failure, or programmable high temperature error
- Automatic safe closure of hot water inlet powered by a replaceable lithium battery monitored for low-level alerting

## Technical Specifications

- 100-240V AC
- Polymer Electronics Enclosure
- Stainless Steel Valve Construction
- Lead Free compliant
- Maximum inlet HW supply temperature 185°F (85°C)
- Minimum Continuous Recirculation - 10 GPM (38 LPM)
- Minimum System Draw Off - 0 GPM
- Conforms to ASSE 1017, CSA B125.3-11, UL E357437, and CE
- Operational water pressure of 10-150 psig (.7-10 barg)
- Display in °C or °F
- SAGE® (BS) for BAS or Mobile Connectivity
- Shipping weight 665 lbs (301.6 kg)

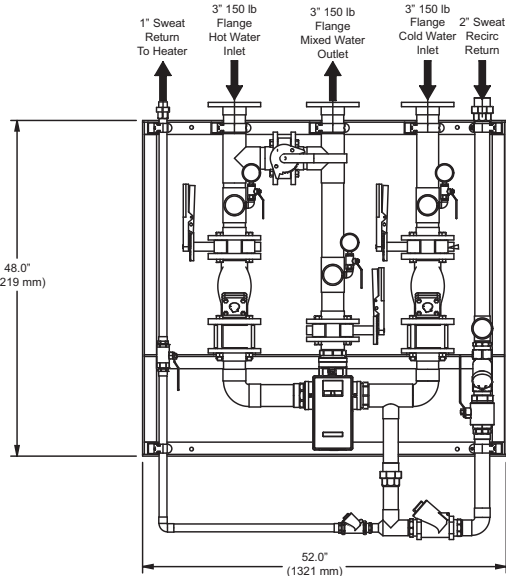

For a submittal drawing, refer to D40816

| Recirculation Systems - Digital (GPM and PSIG) |                      |     |     |     |                         |                |
|--|----------------------|-----|-----|-----|-------------------------|----------------|
| Model<br>DMC80BS                               | Pressure Drop (PSIG) |     |     |     | Minimum System Draw-Off | C <sub>v</sub> |
|  | 5                    | 10  | 15  | 20  |                         |                |
| GPM  | 94                   | 133 | 163 | 188 | 0                       | 42             |

| Recirculation Systems - Digital (LPM and BARG) |                      |       |       |       |                         |                |
|--|----------------------|-------|-------|-------|-------------------------|----------------|
| Model<br>DMC80BS                               | Pressure Drop (BARG) |       |       |       | Minimum System Draw-Off | C <sub>v</sub> |
|  | 0.3                  | 0.7   | 1.0   | 1.4   |                         |                |
| LPM  | 355.8                | 503.5 | 617.0 | 711.7 | 0                       | 42             |

Designs, materials, weights and performance ratings are approximate and subject to change without notice. Visit [armstronginternational.com](http://armstronginternational.com) for up-to-date information.