





TVS-800 Series Trap Valve Stations

Cast Iron for Horizontal Installation, with Integral Piston Valves
For Pressures to 17 bar...Capacities to 2 000 kg/h


Steam Trapping and Steam Tracing Equipment

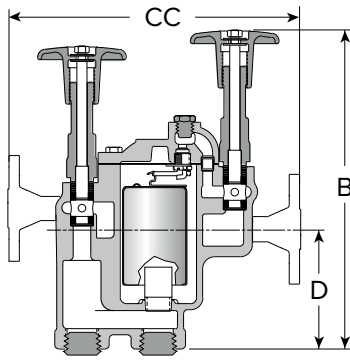

Model TVS-811

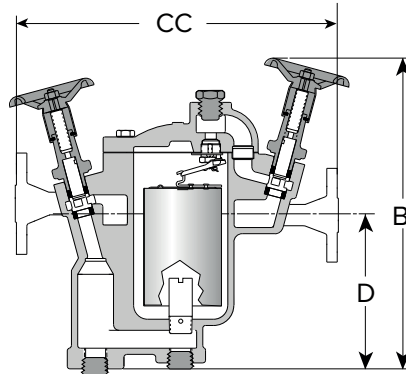

Series TVS-812/813

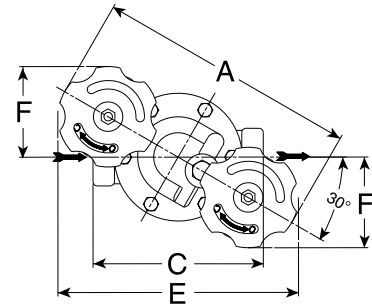

Series TVS-811/812/813 - Top View

Same principle. Different package. Now the energy-saving performance and reliability of the inverted bucket steam trap are available in a versatile new package.

You'll still enjoy all the familiar benefits. And the same efficient condensate drainage from virtually every kind of steam-using equipment. But what you'll find new are all the benefits of a piston valve integrated into the same space-saving package.

Maximum Operating Conditions

Maximum allowable pressure (vessel design): 17 bar @ 232°C
Maximum operating pressure: 17 bar
Maximum back pressure: 99% of inlet pressure

Connections

Screwed BSPT and NPT
Flanged DIN or ANSI (screw on)

Materials

Cap and Body: ASTM A48 Class 30
Internals: All stainless steel – 304
Valve and seat: Stainless Steel 17-4PH
Piston Valve Handle : Cast Iron ASTM A47
Internals: Stainless Steel
Valve Sealing Rings: Graphite and Stainless Steel
Blowdown valve: Stainless Steel

Options

- Stainless steel internal check valve
- Thermic vent bucket
- Stainless steel pop drain
- Integral strainer
- Scrub wire
- Probe connection
- Blowdown valve (TVS-811 and TVS-812 only)

Specification

Inverted bucket steam trap, type ... in cast iron, with continuous air venting at steam temperature, free-floating stainless steel mechanism, and discharge orifice at the top of the trap. Integral upstream and downstream shutoff piston style valves in same dimensional space as standard bucket trap. Maximum allowable back pressure 99% of inlet pressure.

How to Order

- Specify:
- Model number
 - Size and type of pipe connection
 - Maximum working pressure that will be encountered or orifice size
 - Any options required

Table ST-152-1. TVS-800 Series Trap Valve Station (dimensions in mm)

Model No.	TVS-811	TVS-812	TVS-813
Pipe Connections	15 – 20	15 – 20	20 – 25
Test Plug	1/4"	1/2"	3/4"
"A" Width Across Handwheels	197	349	384
"B" Height Valve Open	254	298	362
"C" Face-to-Face (screwed)	127	165	197
"CC" Face-to-Face (flanged PN40*)	247 – 257	285 – 295	327 – 359
"D" Bottom to \varnothing Inlet	94	121	184
"E" Width	179	330	365
"F"	68	114	124
Number of Bolts	6	6	6
Weight in kg (screwed)	5,4	11,3	24,0
Weight in kg (flanged PN40*)	6,8 – 7,0	12,7 – 13,5	25,8 – 26,3

* Other flange sizes, ratings and face-to-face dimensions are available on request.




All models comply with the Article 4.3 of the PED (2014/68/UE).

† May be derated depending on flange rating and type.

All dimensions and weights are approximate. Use certified print for exact dimensions. Design and materials are subject to change without notice.

TVS-800 Series Trap Valve Stations

Cast Iron for Horizontal Installation, with Integral Piston Valves
For Pressures to 17 bar...Capacities to 2 000 kg/h

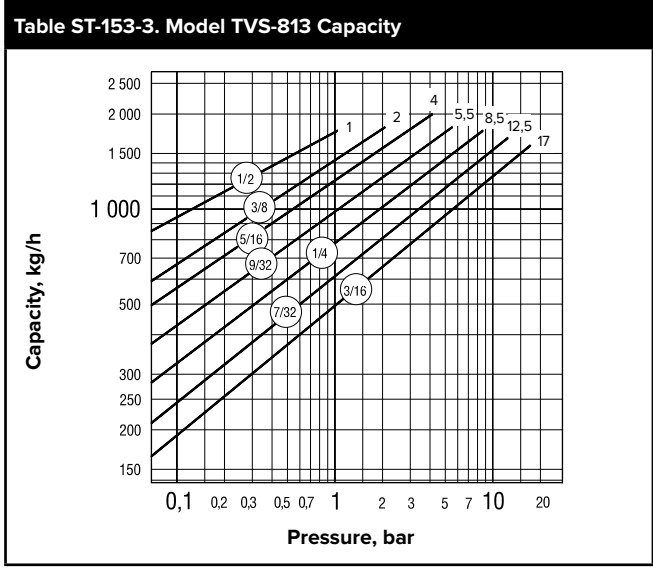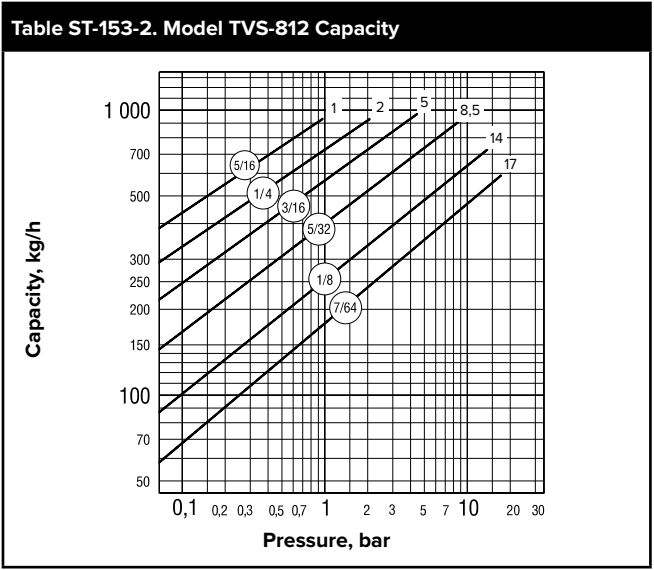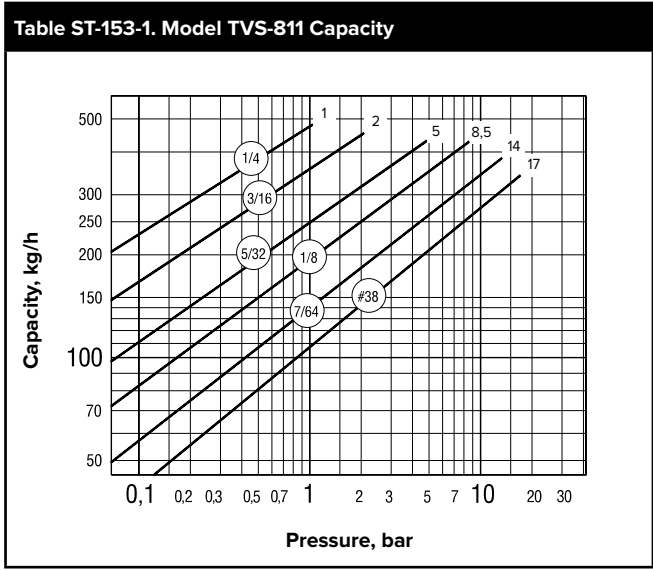

Options


Internal Check Valves are spring-loaded stainless steel and screw directly into the trap inlet or into an extended inlet tube having a pipe coupling at the top to save fittings, labor and money.

Thermic Vent Buckets have a bimetal controlled auxiliary air vent for discharging large amounts of air on start-up.

Integral Strainer is made from 20 x 20 stainless steel screen.

Probe Connections are available for trap monitoring.

Blowdown Valve for clearing strainer of dirt and debris.

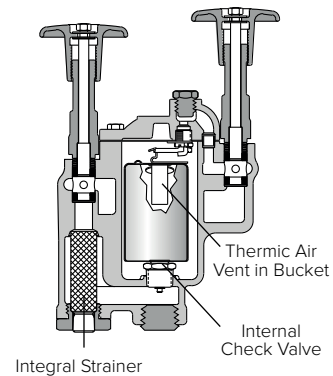

All dimensions and weights are approximate. Use certified print for exact dimensions. Design and materials are subject to change without notice.