


APPROVAL

- $\ \square$ APPROVED, PROCEED WITH FABRICATION
- APPROVED AS NOTED, PROCEED WITH FABRICATION IN ACCORDANCE WITH COMMENTS
- ☐ DISAPPROVED, DO NOT FABRICATE

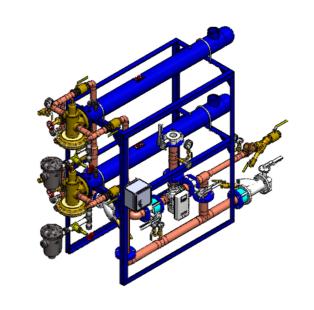


61.2 [1556] 29.8±1.0 [757±25] 75.7 [1924] 56.3±1.0 [1430±25] 54.3 [1378] [1162] 50.1±2.0 [1274±51] 26.3±1.0 23.6±1.0 [668±25] **₹** [600±25]

57.0

[1448]

FLO-RITE-TEMP

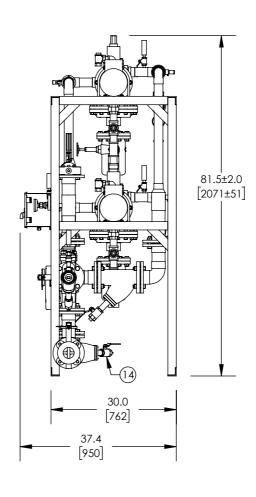

5.5±1.0

[141±25]

20.7 [527]

ITEM	M DESCRIPTION		CONNECTION	
1	COLD W	/ATER INLET	3" FLG ANSI 150	
2	MIXED WATER OUTLET		3" FLG ANSI 150	
3	RECIRC WATER INLET		2" NPT	
4	STEAM INLET (2)		3" NPT	
5	CONDENSATE OUTLET (2)		1-1/4" NPT 814IB	
6	ELECTRICAL PANEL		110 VAC @0.7A	
7	DRV80		3" NPT	
8	CONTROL VALVE (2)		2" NPT	
9	THERMOMETER(5)		1/2" NPT	
10	CIP CONNECTION(4)		1" NPT	
11	AIR VENT (2)		3/4" NPT	
12	VACUUM BREAKER (2)		1/2" NPT	
13	BYPASS TO DRAIN (2)		1-1/2" NPT	
14	BLOW DOWN(3)		1" NPT	
15	PRESSURE GAUGE (5)		1/4" NPT	
	ITEM		MATERIAL	
	PIPING		COPPER TYPE "L"	
	EXCHANGER SHELL MATL.		CARBON STEEL	
	EXCHAN	IGER TUBE MATL.	ADMIRALTY BRASS ONG INTERNATIONAL	

NOTE(S):

1. ALL DIMENSIONS +/-0.5 [13] UNLESS OTHERWISE SHOWN.


24.3 [616]

2. COMPLETE ASSEMBLY LEAD FREE COMPLIANT - THE WETTED SURFACE OF THIS PRODUCT CONTACTED BY CONSUMABLE WATER CONTAINS LESS THAN ONE QUARTER OF ONE PERCENT (0.25%) OF LEAD BY WEIGHT.

9.4±1.0

[238±25]

- 3. PACKAGE INCLUDES ALL REQUIRED INLET CHECK VALVES, ISOLATION VALVES, AND STRAINERS ON DOMESTIC SIDE.
- DRV AND ELECTRICAL PANEL ARE PREWIRED TO PROVIDE A SINGLE ELECTRICAL LANDING POINT AT THE PANEL.

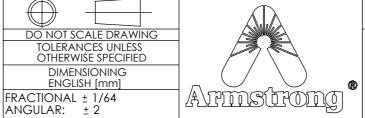

ARMSTRONG INTERNATIONAL Copyright © 2010 ARMSTRONG INTERNATIONAL, INC.

FRT665P80

DECIMAL .XXXX ± .0005 .XXX ± .005 .XX ± .015 .XX ± .015 .XX .010

DRAWN RELEASED

NAME

DATE

MATERIAL 5/18/2015 CWF55983

′ c |

SALES

SHEET 1 OF 1