

DIMENSIONS & DATA CERTIFIED FOR:

Representative:

Order:

Customer:

Order:



Project:

Requirements:

By:

Date:

TAG	V1	S1	AV	PR	PI	CV	T1	AT	--	--
DESCRIPTION & MATERIAL	1" GATE VALVE BRONZE ASTM B-62	1" STRAINER W/BLOWDOWN CAST IRON ASTM A48-30 ARMSTRONG CA9SC	1/2" AIR VENT 304SS ARMSTRONG TTF-1R	1" PRESSURE REDUCING VALVE CAST BRONZE ASTM B584 ARMSTRONG GD-30	1/4" PRESSURE GAUGE W/ ISOLATION VALVE 0-200 PSIG	1" INLINE CHECK VALVE ASTM A351 CF8M DURABLE SCV	STEAM TRAP ARMSTRONG 1/2" 811TVS -STR/CV	ACCUMULATOR 150 PSIG 4" X 24" CARBON STEEL ASME SEC. VIII "U" STAMP	FITTINGS 150# MALLEABLE IRON ASTM A197 GR. 50	PIPING ASTM A53

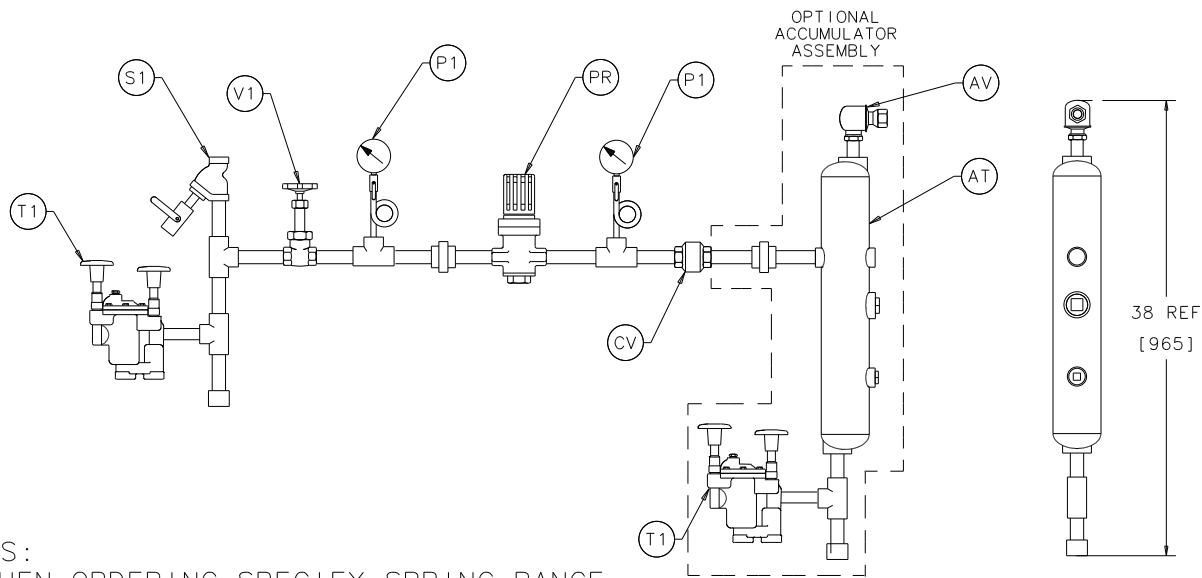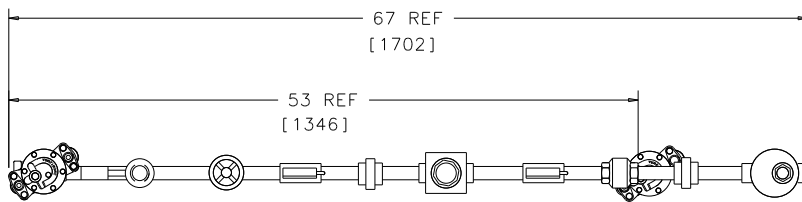

NOTES:

1. WHEN ORDERING SPECIFY SPRING RANGE FOR THE GD-30 PRV.
2. ARMSTRONG RESERVES THE RIGHT TO CHANGE THE DESIGN MATERIALS, OR COMPONENTS WITHOUT NOTICE.
3. ACCUMULATOR ASSEMBLY CAN BE ORDERED AS AN OPTION.
4. RATED FOR 150 PSIG [10.3 BAR] MAX.



Product	ENGLISH	CD No.	Date
1" PRV STATION GENERAL ARRANGEMENT DRAWING	WEB	CD2319	8/05/09
	Y L N X		
Rev; A		CN21929	By; E. FRITTS