



- 1. CLERANCE NOTE: LEAVE 24[610] SERVICE CLEARANCE INFRONT OF THE ABH BOXES.
- 2. (10) AND GAUGES ARE SHIPPED LOOSE. TO BE INSTALLED IN FIELD

NOTES:

- 4. THE DISTANCE BETWEEN THE OUTERMOST COMPONENT OF THE DMC TO THE OUTERMOST COMPONENT OF THE TANK SHOULD BE 12 +/- 1.0 [305 +/- 25.4]
- 5. ALL PIPING FROM DMC TO TANK AND WATER MANIFOLD TO TANK WILL NEED SUPPORTS ADDED IN THE FIELD AS REQUIRED

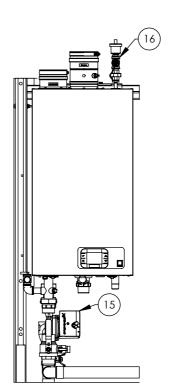

LOW WATER CUTOFF AND PUMP [NOT FULLY DETAILED]



TOP OF TANK CONNECTION PIPING HIDDEN FOR CLARITY

APPROVAL DATE:

- $\ \square$ APPROVED, PROCEED WITH FABRICATION
- ☐ APPROVED AS NOTED, PROCEED WITH FABRICATION IN ACCORDANCE WITH COMMENTS
- ☐ DISAPPROVED, DO NOT FABRICATE

.010 .10

RELEASED

TOLERANCES UNLESS OTHERWISE SPECIFIED

.XXXX ± .0005 .XXX ± .005

± .015

DIMENSIONING

ENGLISH [mm]

FRACTIONAL ± 1/64 ANGULAR: ± 2



BACKSIDE VIEW OF THE WATER HEATERS ITEM DESCRIPTION CONNECTION QTY **VENT INTAKE** 7" CONN 2 **VENT EXHAUST** 7" CONN 3 GAS REGULATOR 5 PSI NG/LPG 2" NPT **CONDENSATE OUTLET** 1-1/2" SOC STORAGE TANK 30 DIA 220 GALLON 5 LOAD CENTER (208/240)/1/60 CASCADE PANEL 8 ABH-599 COLD WATER INLET 3" FLG ANSI 150 TANK RELIEF VALVE 125# 10 3/4" NPT

HEATER RELIEF VALVE 125#

MIXED WATER OUTLET

RECIRC RETURN INLET

DMC80 ASSEMBLY

CIRCULATOR PUMP 39.6 GPM

LOW WATER CUT-OFF

ITEM

WATER PIPING

VENTING CONNECTIONS

TANK INSULATION TYPE

TANK LINING

12

13

14

15

ARMSTRONG INTERNATIONAL Copyright (C) 2010 ARMSTRONG INTERNATIONAL, INC.

ABH599MD 2 220A CWIS NAT GAS DMC80



DATE NAME DRAWN 5/18/2015

CN69799

MATERIAL

A SALES

3/4" NPT

3" FLG ANSI 150

2" SWT SEE DMC APPROVAL SHEET

CONNECTION

COPPER TYPE "L'

SS

BARE METAL

GLASS

SHEET 1 OF 1