

DIMENSIONS & DATA CERTIFIED FOR:

Representative:

Order:

Customer:


Order:

Project:

Requirements:

By:

Date:

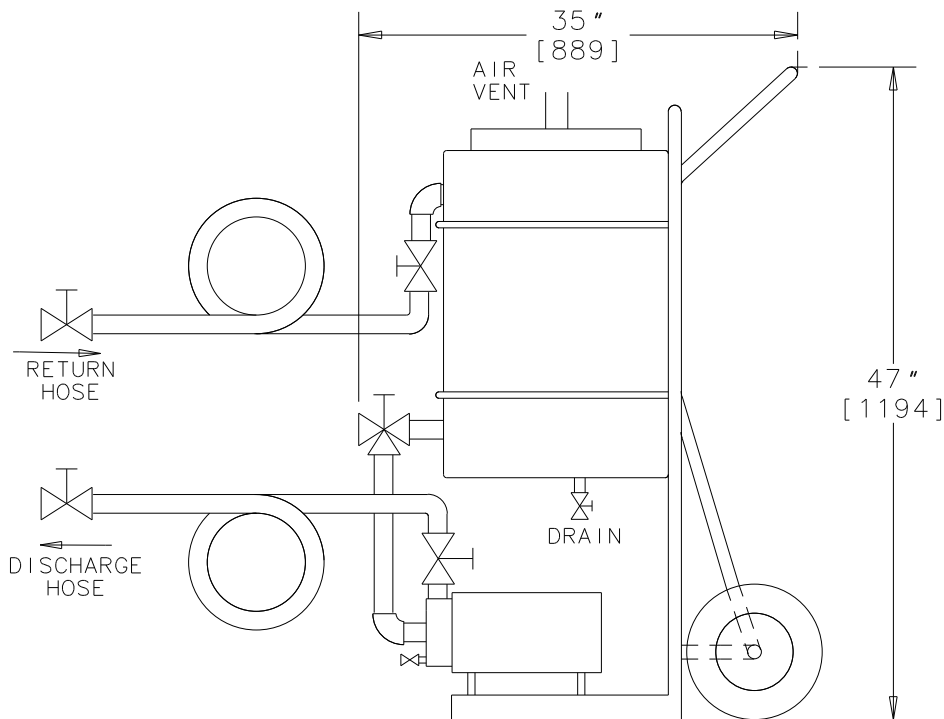

Materials

Pump	Teflon coated cast iron body and barform impeller. Rotary graphite seal with ceramic seat.
Pump Motor	1/2 Hp, 3450 RPM, 115/230V, 60 cycle AC
Tank	15 gallon-polypropylene-DOT certified
Hoses	Clear, reinforced PVC hose
All Piping	PVC Sch. 80
Valves	PVC
Hand Truck	Steel frame with 8" rubber wheels



ARMSTRONG HOT WATER GROUP

221 Armstrong Blvd.,

Three Rivers, MI. 49093

Armstrong

(269) 279-3600 Fax(269) 273-8656

Posted on Armstrong's homepage www.armstrong-intl.com

Product

CDY No.

Date

CLEAN-IN-PLACE
SCALE REMOVAL
SYSTEM

1071

3/26/98

Rev.

A