

DIMENSIONS & DATA CERTIFIED FOR:

Representative:

Order:

Customer:


Order:

Project:

Requirements:

By:

Date:

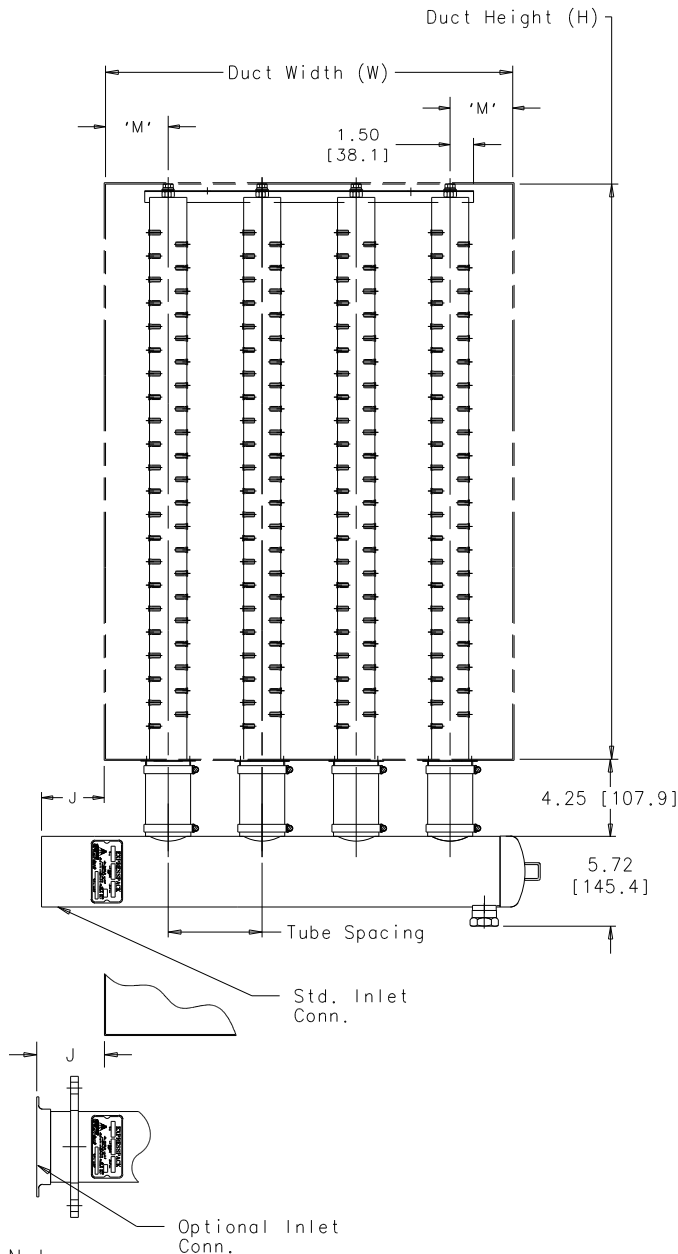

Notes:

1. ExpressPack Components Typically Shipped Loose.
2. For Sizing Information See Bulletin 554

Header

Header Size	4"
Max. Capacity	800 lbs/hr [363 K/hr]
Std Inlet Conn	4" Pipe Stub J=4 [102]
Optional Conn	4" 150 Back up J=4.3 [109]
Drain Conn	1" NPT Drain

Dispersion Tube

Tube Size	2"
Max Capacity/Tube	70 lbs/hr [32 K/hr]
* ϕ 2" tubes of 16" [406] or less have reduced capacity. Please contact factory.	

Materials

Header	T304 SS
Dispersion Tubes	T304 SS
Hose Cuffs	EPDM w/Fabric Reinforcement
Outboard Plate	T304 SS ASTM A240
Inboard Plate	T304 SS ASTM A240
"Bolts, Nuts, Washers"	Zinc Plated Carbon Steel

Panel Data

Duct Height (in)	
Duct Width (in)	
Tube Spacing (in)	6"[152], 9"[229], 12"[305]
Tube Quantity	
Capacity (lbs/hr)	
Absorption Distance (in)	
Tube Dia. (in)	2" [51]
Header Dia. (in)	4" [102]
Cover Plates Required	YES/NO
"M" =	4" [102] min.
Inlet Connection;	



Armstrong

www.armstronginternational.com

Product

ExpressPack DUCT
4" Header / 2" Tubes

ENGLISH

WEB
YIN

CD No.

CD2460

Rev; A

Date

5-17-10

By; R.H.