

# DIMENSIONS & DATA CERTIFIED FOR:

Representative:

Order:

Customer:



Order:

Project:

Requirements:

By:


Date:

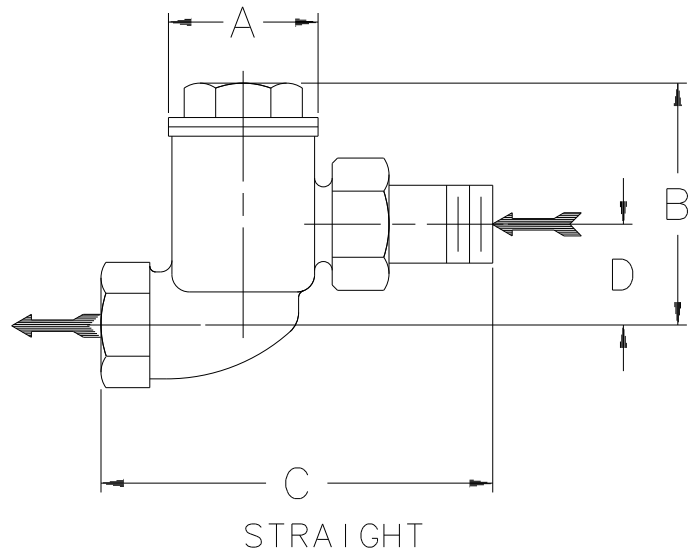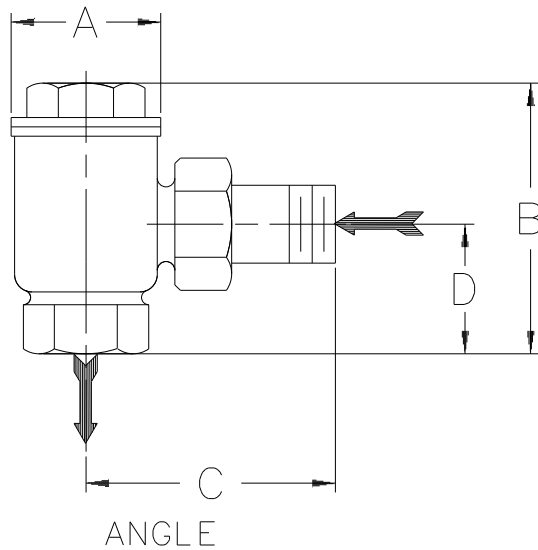

Dimensions				
Pattern	Angle		Straight	
Connection Size	1/2" [15]	3/4" [20]	1/2" [15]	3/4" [20]
"A"	1-5/8" [41mm]	1-5/8" [41mm]	1-5/8" [41mm]	1-5/8" [41mm]
"B"	2-15/16" [75mm]	3" [76mm]	2-11/16" [68mm]	2-7/8" [73mm]
"C"	2-9/16" [65mm]	2-7/8" [73mm]	4" [102mm]	4-1/2" [114mm]
"D"	1-3/8" [35mm]	1-5/8" [41mm]	1-1/8" [29mm]	1-5/16" [33mm]
Weight	1-1/2 lbs [0.7 kgs]	1-3/4 lbs [0.8 kgs]	1-1/2 lbs [0.7 kgs]	2 lbs [0.9 kgs]

Materials	
Cap	Bronze, ASTM B-62
Body	Bronze, ASTM B-62
Union Nipple	Bronze, ASTM B-584
Valve	Brass
Valve Seat	Stainless Steel
Element	Phosphor-Bronze Bellows

Specifications	
Maximum Allowable Pressure (Vessel Design)	50 psig at 300 °F [3.4 bar at 149 °C]
Pressure	50 psi [3.4 bar]



Armstrong Pressure/Temperature Group  
221 Armstrong Blvd.,  
Three Rivers, MI. 49093  
**Armstrong** (269) 279-3600 Fax(269) 273-8656  
Posted on Armstrong's homepage [www.armstrong-intl.com](http://www.armstrong-intl.com)

Product	CDY No.	Date
TS-2 RADIATOR TRAP	1045	3/06/98
		Rev. A