

26.4±1.0 [671±25] 49.5

[1257]


45.0 [1143]

17.2±1.0


[436±25]

APPROVAL

- $\ \square$ APPROVED, PROCEED WITH FABRICATION
- APPROVED AS NOTED, PROCEED WITH FABRICATION IN ACCORDANCE WITH COMMENTS
- ☐ DISAPPROVED, DO NOT FABRICATE

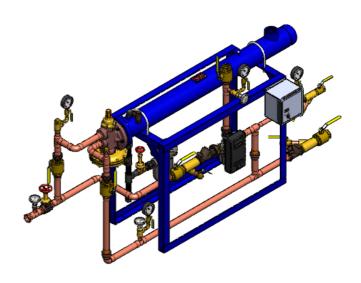

FLO-RITE-TEMP

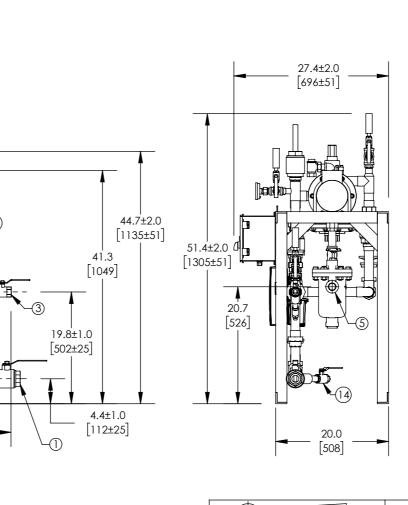

ITEM	DESCRIPTION	CONNECTION
1	COLD WATER INLET	1-1/2" NPT
2	MIXED WATER OUTLET	1-1/2" NPT
3	RECIRC WATER INLET	1" NPT
4	STEAM INLET	2-1/2" NPT
5	CONDENSATE OUTLET	1" NPT 813IB
6	ELECTRICAL PANEL	110 VAC @0.7A
7	DRV40	1-1/2" NPT
8	CONTROL VALVE	1-1/2 NPT
9	THERMOMETER(4)	1/2" NPT
10	CIP CONNECTION(2)	1" NPT
11	AIR VENT	3/4" NPT
12	VACUUM BREAKER	1/2" NPT
13	BYPASS TO DRAIN	1-1/2" NPT
14	BLOW DOWN(2)	3/4" NPT
15	PRESSURE GAUGE (4)	1/4" NPT
16	BLOWDOWN	1/2" NPT
	ITEM	MATERIAL
	PIPING	COPPER TYPE "L"
	EXCHANGER SHELL MATL.	CARBON STEEL
	EXCHANGER TUBE MATL.	ADMIRALTY BRA

NOTE(S):


- 1. ALL DIMENSIONS +/-0.5 [13] UNLESS OTHERWISE SHOWN.
- 2. COMPLETE ASSEMBLY LEAD FREE COMPLIANT THE WETTED SURFACE OF THIS PRODUCT CONTACTED BY CONSUMABLE WATER CONTAINS LESS THAN ONE QUARTER OF ONE PERCENT (0.25%) OF LEAD BY WEIGHT.

17.7±1.0

[450±25]

34.0±1.0 [864±25] 13.8±1.0

- 3. PACKAGE INCLUDES ALL REQUIRED INLET CHECK VALVES, ISOLATION VALVES, AND STRAINERS ON DOMESTIC SIDE.
- 4. DRV AND ELECTRICAL PANEL ARE PREWIRED TO PROVIDE A SINGLE ELECTRICAL LANDING POINT AT THE PANEL.

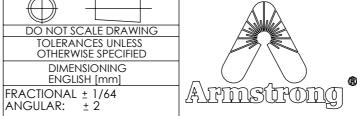

ARMSTRONG INTERNATIONAL Copyright © 2010 ARMSTRONG INTERNATIONAL, INC.

FRT53540

DECIMAL .XXXX ± .0005 ..XXX ± .005 ..XX ± .015 ...XX ± .015 ...XX ± .015 ...XX .010

RELEASED

NAME DRAWN

DATE 5/18/2015

MATERIAL

CWF55983

V C

SALES

SHEET 1 OF 1